
## High Bay / Smooth surface / PD-A-VHB



Model	PD-A-VHB-120	PD-A-VHB-240
-------	--------------	--------------

Power	80 W – 100 W – 120 W selectable	150 W – 200 W – 240 W selectable	
Lumens	180 lm/W or 145 lm/W		
Input voltage	AC 100 – 277 V / AC 200 – 488 V		
Beam angles	60°/90°/120° and reflector	60°/90°/120° and reflector	
IRC	75+ (80+ optional)		
ССТ	3,000K / 4,000K / 5,000K selectable		
Light source	Lumileds 5050		
LED driver	Sosen / Meanwell		
Power factor	≥ 0.95		
Distorsion	< 15%		
Overvoltage protection	10 kV		
Operating temperature	-30°C ~ +50°C		
Dimming options	Dimmer 1-10 V / DALI / Zigbee / Bluetooth / Brightness sensor / Motion sensor		
IP	IP65		
Service life	50,000 h		
Dimensions	370 x 370 x 200 mm	450 x 450 x 200 mm	
Weight	2.2 kg	3.3 kg	
Warranty	5 years (10 years optional)		
Colour	Black (silver, white optional)		



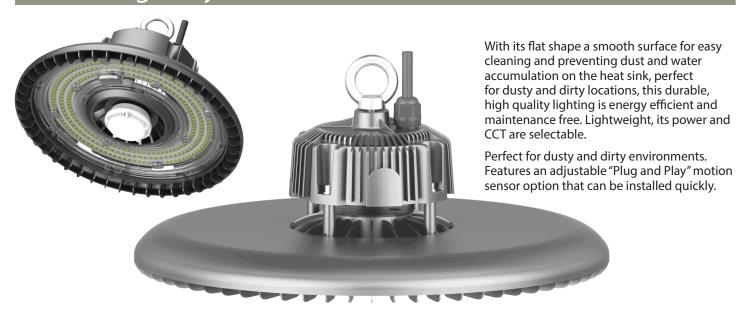







1435, chemin Saint-Armand Saint-Armand (Québec) J0J 1T0 Canada

(514) 433.3386 www.purrplelighting.com info@purrpledistribution.com

## High Bay / Smooth surface / PD-A-VHB

## Accessories

